


LED LINEAR LumRUN


Make Your Building Impossible to Ignore by transforming your building's exterior with the LumRUN Continuous Linear LED Lighting System—a high-performance architectural lighting solution engineered to create striking, uninterrupted lines of light that enhance architectural features and strengthen your brand presence.

Designed for exterior building facades, canopies, and other linear applications, LumRUN delivers exceptional illumination with clean, continuous run lengths that create a dramatic visual statement while maximizing energy efficiency. Whether for new construction or retrofit projects, LumRUN provides the flexibility, performance, and reliability today's commercial projects demand.

Ideal for distributors, contractors, ESCOs, and national account programs, LumRUN's versatile design simplifies inventory while delivering premium architectural performance across a wide range of commercial applications.



Side Wall Mount

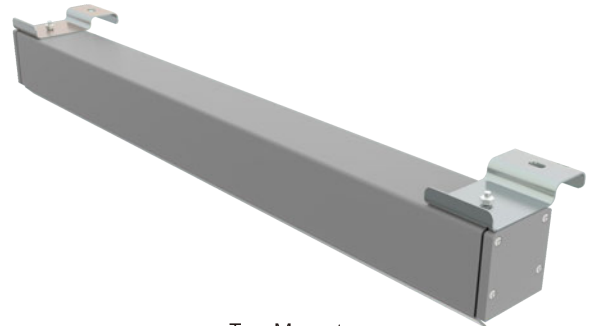

Top Mount

FEATURES

CONSTRUCTION

- Cast aluminum body with corrosion-resistant hardware
- High-Efficiency LED Technology delivers exceptional light output while reducing energy consumption
- Single Power Feed required for each continuous fixture run simplifies electrical installation
- Plug-and-Play Installation –fixtures are not opened during installation reducing installation time and labor costs.
- Universal 120-347v
- Wall mount and top mount hardware included
- Standard 4KV Surge Protection
- +80 CRI

LISTING

- UL and cUL Listed
- Wet location rating
- 5-Year Warranty

HOUSING

- Versatile installation - ships with both wall mount & top mount brackets standard

FINISH

- UV stabilized powder coated finish
- Aluminum Finish standard

LENS

- High Impact Polycarbonate lens
- Custom wall wash optics standard



SPECIFICATIONS

Lumen Package (LM):	Up to 2171 lumens
Wattage Range (W):	9 to 18 watts nominal
Efficacy Range (LPW):	Up to 119 LPW
Product Weight:	4.46LBS(2') / 5.76LBS(3') / 7.12LBS(4')
Carton LBS:	0.44LBS(2') / 0.64LBS(3') / 0.78LBS(4')

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

ORDERING GUIDE

Series	Nominal Wattage	CCT	Distribution
LR LumRUN	09 09 Watts for 2 foot 14 14 Watts for 3 foot 18 18 Watts for 4 foot	5 5000K 4 4000K ¹ 3 3000K ¹	D Downlight Only
Voltage	Mounting	Color	
U Universal 120-277V	WT Wall/Top Mount	AL Aluminum BZ Bronze ¹ BL Black ¹ CR Custom RAL Color ¹	

Foot Notes:

1 Manufactured to order, longer lead times apply, check with factory for lead time and minimum requirements.

ACCESSORIES



Whip Kit / Installation Kit
LRACC-10001




Template
LRACC-10002


Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

DISTRIBUTION

ISO illuminance diagram(Lux) of 5000K

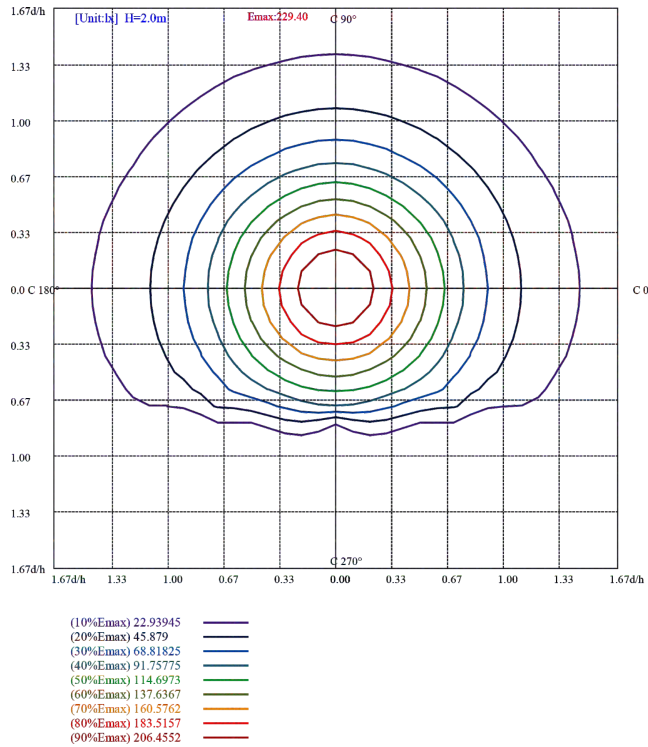

Polar Curves of 5000K

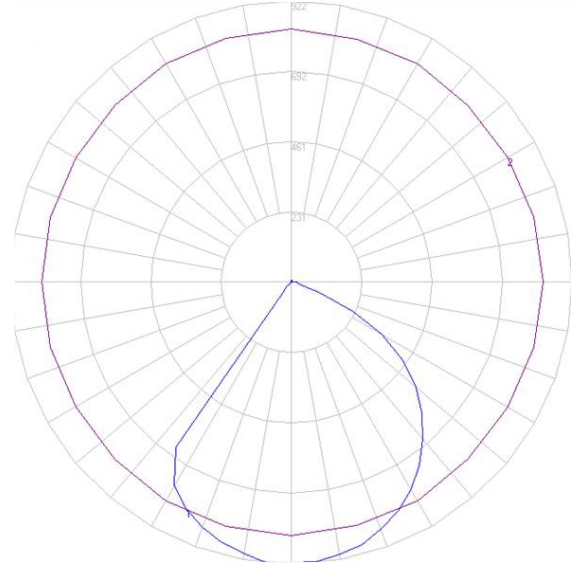

PERFORMANCE DATA

Performance Data			3000K					4000K					5000K				
Nominal Wattage	Distribution	CRI	Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating		
					B	U	G			B	U	G			B	U	G
9 watts	1 Type I	+80	1005	104	1	0	0	1060	109	1	0	0	1096	113	1	0	0
14 watts	1 Type I	+80	1483	106	1	0	0	1564	112	1	0	0	1617	116	1	0	0
18 watts	1 Type I	+80	1991	109	1	0	0	2099	115	1	0	0	2171	119	1	0	0

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
 Call 866-458-6372 for assistance.

LUMEN MAINTENANCE TESTING DATA


LUMINAIRE AMBIENT TEMPERATURE FACTOR(LATF)		
(°C)	Ambient Temp (°F)	Lumen Multiplier
0°C	32°F	/
10°C	50°F	/
20°C	68°F	/
30°C	86°F	100%
40°C	104°F	98%
50°C	122°F	97%

ELECTRICAL DATA


Nominal Wattage	Input Voltage	Current Amps
9 watts	120	0.08
	208	0.04
	240	0.04
	277	0.03
	347	0.03
14 watts	120	0.12
	208	0.07
	240	0.06
	277	0.05
	347	0.04
18 watts	120	0.15
	208	0.09
	240	0.08
	277	0.06
	347	0.05

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

DIMENSIONS

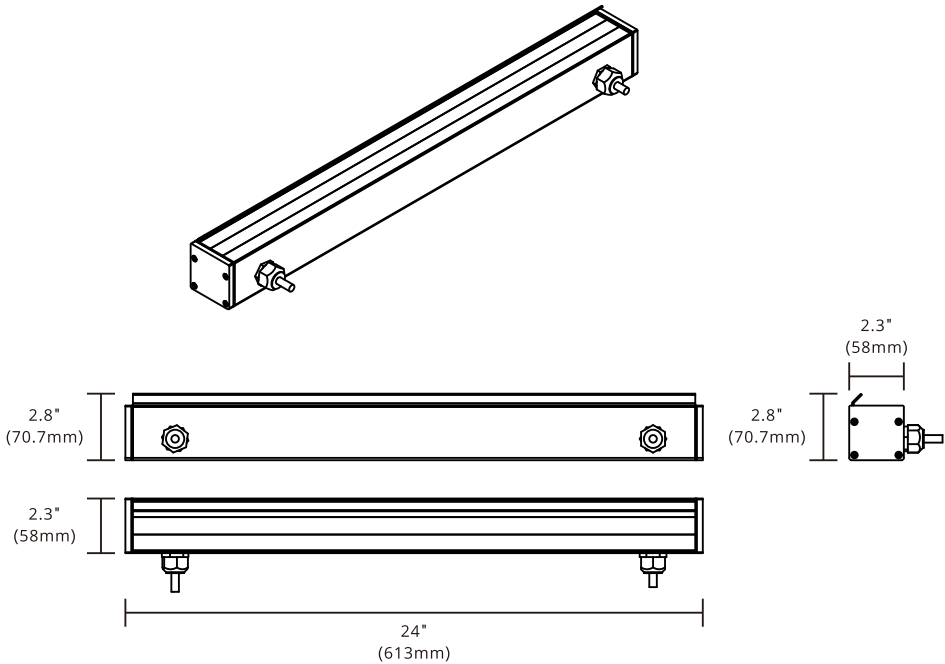



LumRUN 2'

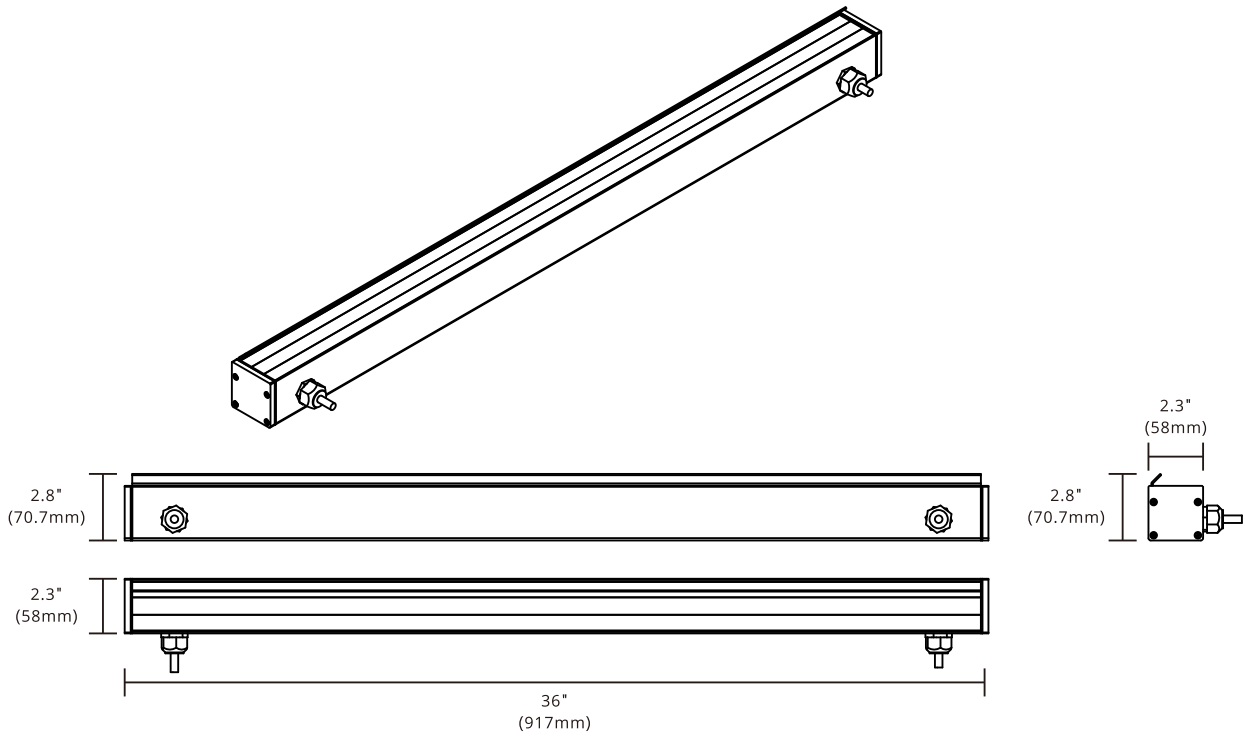

LumRUN 3'

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.


DIMENSIONS

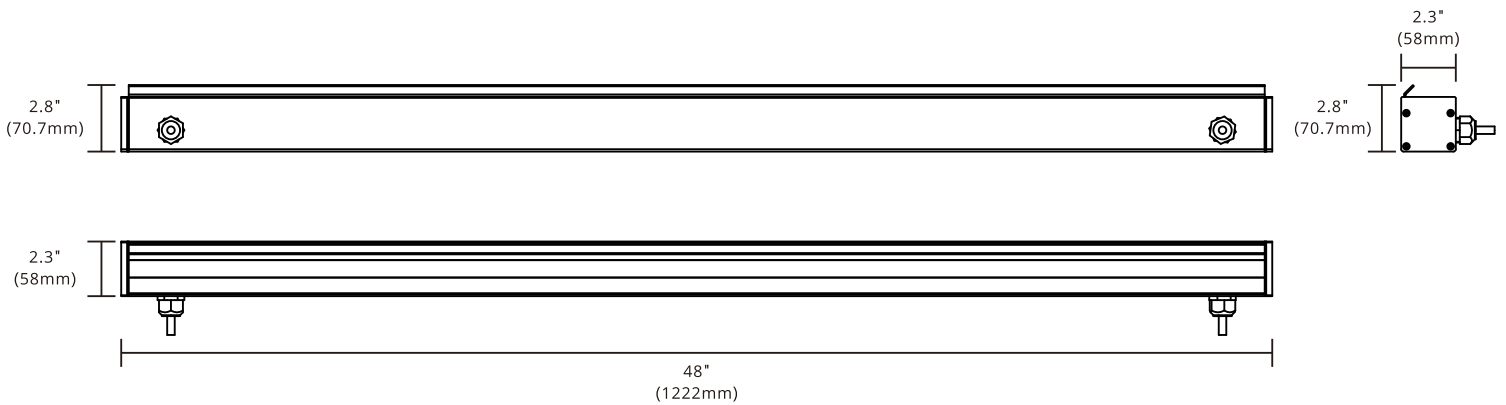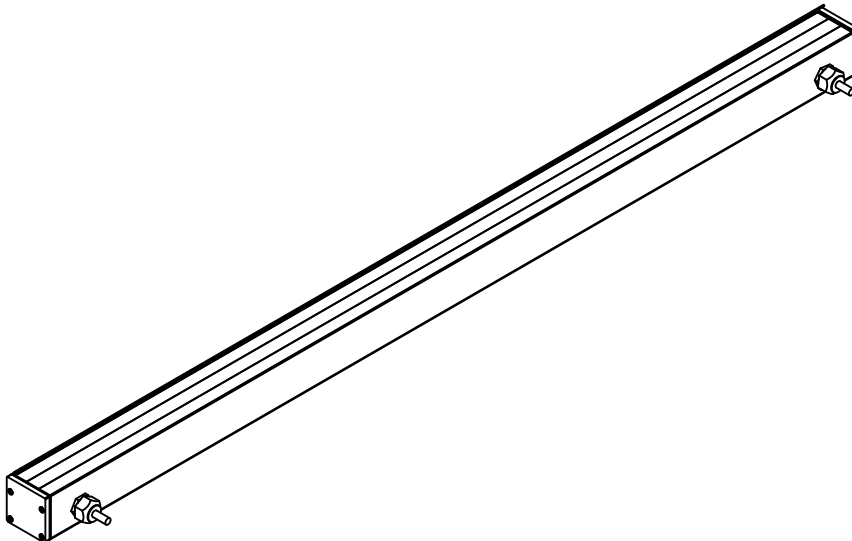

LumRUN 4'

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

CARTON DIMENSIONS

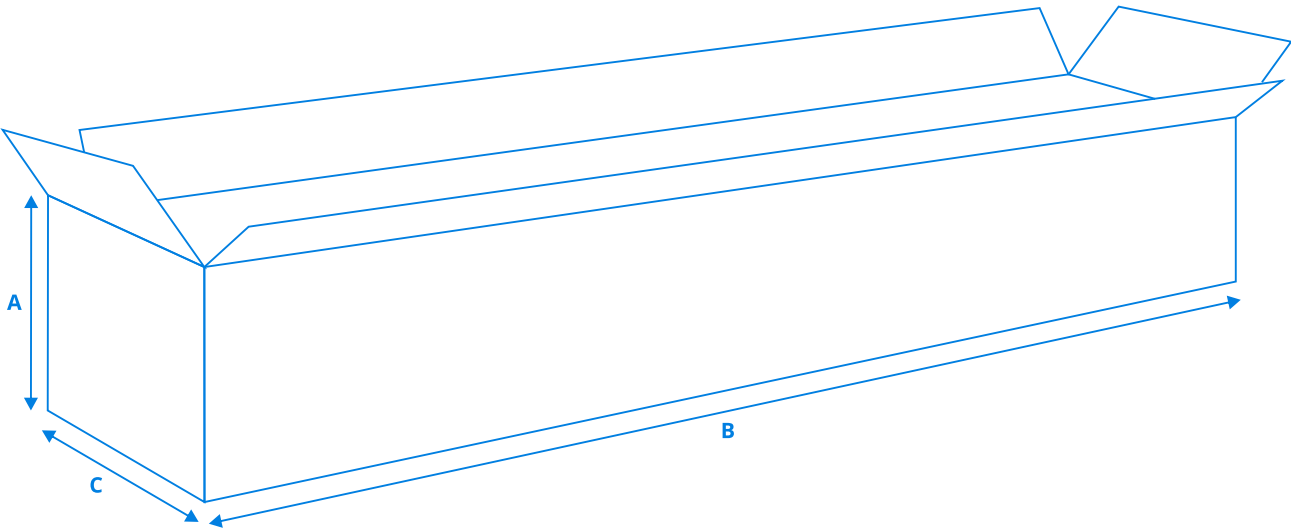

Weights	Carton				
Fixture Size	Carton Pack	Weight LBS	Height A	Width B	Depth C
9 watts	1pc	4.9	5 3/4"	4 3/4"	25 5/8"
14 watts	1pc	6.4	5 3/4"	4 3/4"	38 5/8"
18 watts	1pc	7.9	5 3/4"	4 3/4"	49 1/4"

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.