

LED BOLLARD

LumVERDEN

The LumVERDEN LED Bollard delivers dependable, low-glare illumination that enhances visual comfort while seamlessly blending functionality and durability with a sleek, modern aesthetic. Engineered for reliable performance, it is the ideal solution for illuminating pedestrian walkways and elevating the exterior appeal of offices, apartment complexes, hotels, restaurants, and other national accounts.

Featuring high-efficiency LED technology, the LumVERDEN ensures consistent light output, extended lifespan, and reduced operating costs. With the added flexibility of LumARBOR's adjustable wattage and color temperature options, this bollard is perfectly suited for both new construction and retrofit applications. It offers a smart, stocking-friendly solution for distributors, ESCOs, and national account programs seeking superior performance, installation efficiency, and long-term value.

FEATURES

CONSTRUCTION

- Cast aluminum body with corrosion-resistant hardware
- Quickly separate driver from LED module for easy maintenance.
- Standard 2KV Surge Protection
- 0-10v Dimming Driver
- 80+ CRI

LISTING

- UL and cUL Listed
- IP65 Wet Location Rating
- DLC Listed Premium
- 5-Year Warranty

HOUSING

- Unsurpassed thermal dissipation extending lifetime fixture performance
- Easy installation with versatile mounting plate

FINISH

- UV stabilized powder coated finish
- Bronze Finish standard


LENS

- High impact polycarbonate lens
- Type V optics standard



3 WATTAGE ADJUSTABLE
10W / 20W / 30W

3 CCT ADJUSTABLE
3000K / 4000K / 5000K

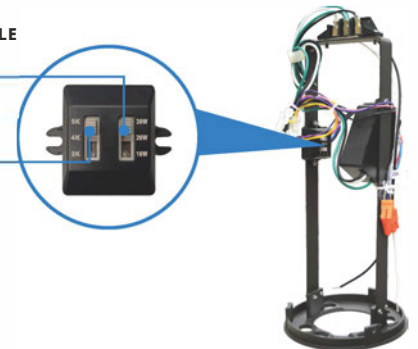

SPECIFICATIONS

Lumen Package (LM):	Up to 3635 lumens
Wattage Range (W):	10-30 watts
Efficacy Range (LPW):	Up to 133 LPW
Product Weight:	12.1LBS
Carton LBS:	3.7LBS

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

ORDERING GUIDE



Series

LV LumVERDEN

Wattage

A 10/20/30 watts

CCT

A 3000/4000/5000K

Voltage

U Universal 120-277V

Mounting


GM Ground Mount

Color


BZ Bronze

DISTRIBUTION

ISO illuminance diagram(Lux) of 3000K

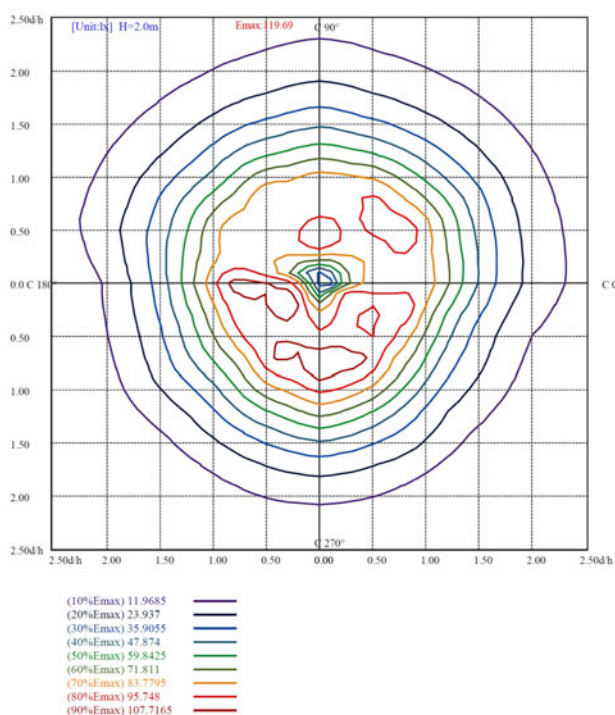

Polar Curves of 3000K

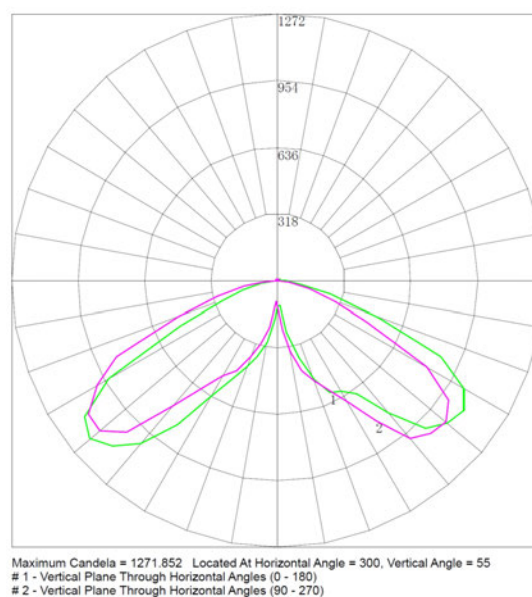

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

PERFORMANCE DATA

Performance Data			3000K					4000K					5000K				
Lumen Package	Distribution	CRI	Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating		
					B	U	G			B	U	G			B	U	G
10 watts	5 Type V	80	1308	124	1	2	1	1353	131	1	2	1	1316	126	1	2	1
20 watts	5 Type V	80	2567	126	1	2	1	2656	133	1	2	1	2583	128	1	2	1
30 watts	5 Type V	80	3513	120	2	2	1	3635	126	2	2	1	3535	122	2	2	1

LUMEN MAINTENANCE TESTING DATA


LUMINAIRE AMBIENT TEMPERATURE FACTOR(LATF)		
Ambient Temp		Lumen Multiplier
(°C)	(°F)	
0°C	32°F	/
10°C	50°F	/
20°C	68°F	/
30°C	86°F	99%
40°C	104°F	98%
50°C	122°F	95%

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

ELECTRICAL DATA


Nominal Wattage	Input Voltage	Current Amps
10 watts	120	0.08
	208	0.05
	240	0.04
	277	0.04
	347	0.03
20 watts	120	0.17
	208	0.10
	240	0.08
	277	0.07
	347	0.06
30 watts	120	0.25
	208	0.14
	240	0.13
	277	0.11
	347	0.09

DIMENSIONS

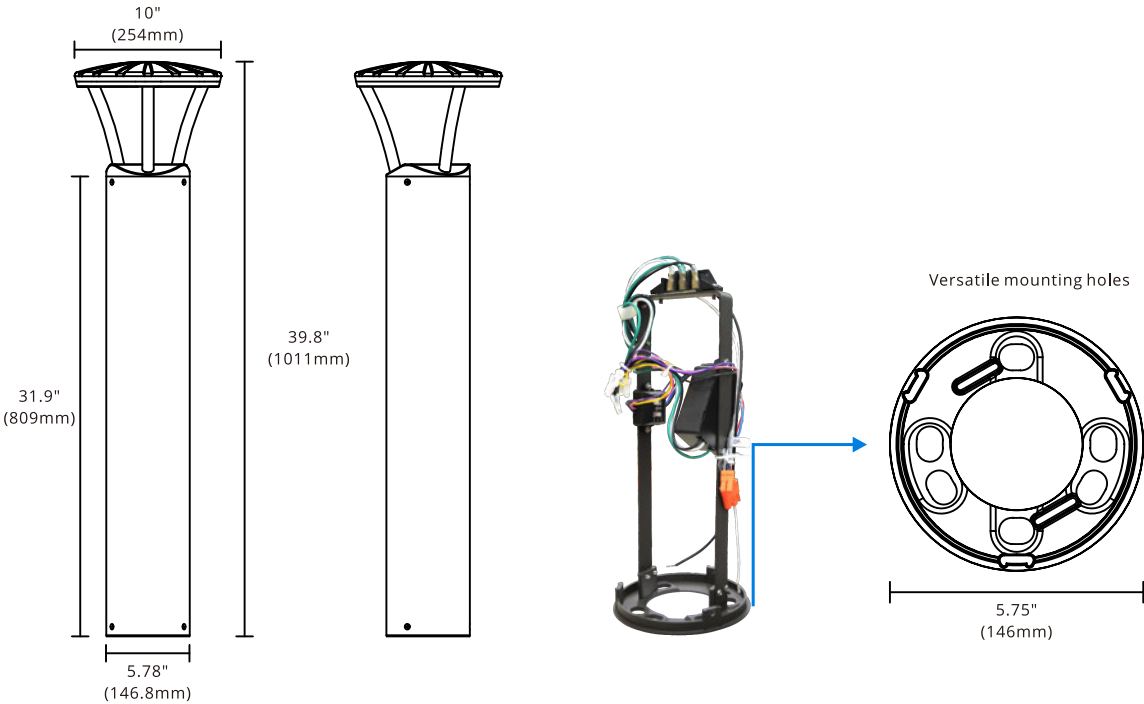

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

CARTON DIMENSIONS

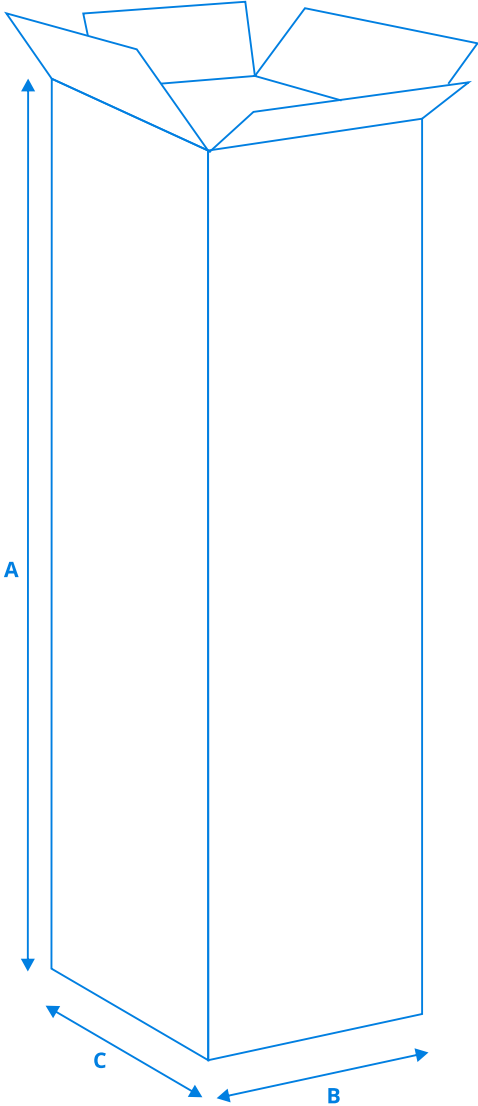

Weights	Master Carton				
Fixture Size	Carton Pack	Master Carton Weight LBS	Height A	Width B	Depth C
30 watts	1pc	15.8	44 1/2"	11 5/8"	11 5/8"

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.